


269A	9256
KIT	A

LET	EFFECTIVE ON		E O NO	DESCRIPTION OF CHANGE	DRAWN BY	CHRD	APPR	DATE
	NO	DATE						
A ₁				WAS PER NPII-1; IS SKIPWELD	RT			
A _L				WAS .50; IS .45				
A _B				WAS BLACK OX. IS PHOSPHAT				

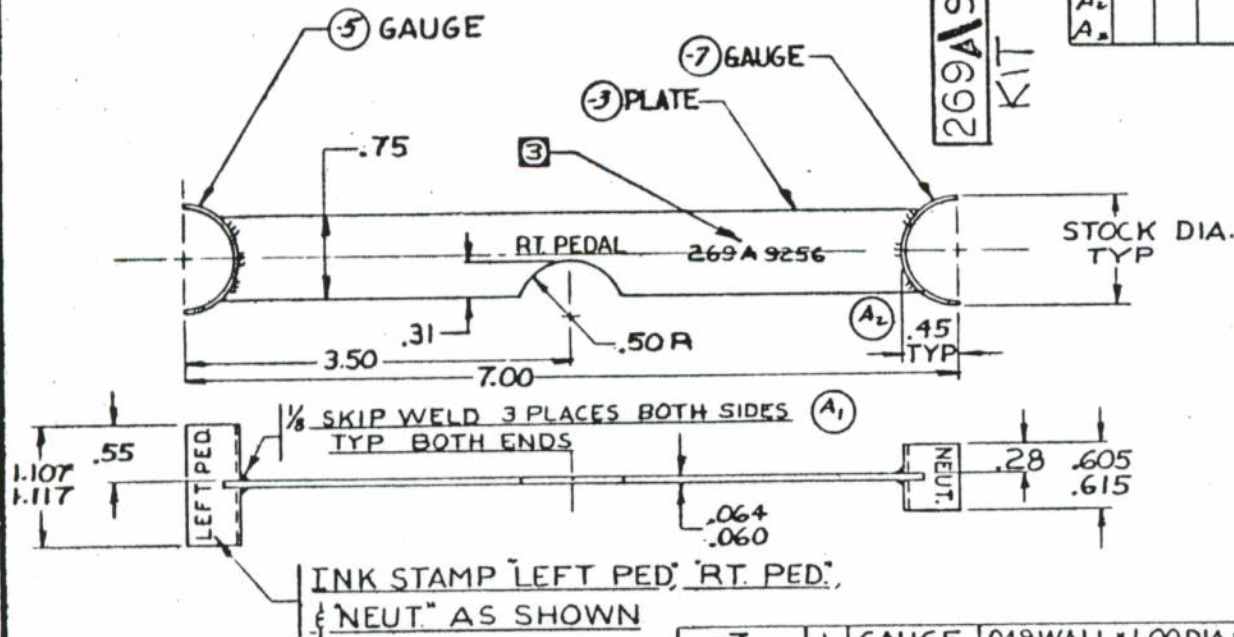

REDUCED SIZE PRINT

-7	1	GAUGE	.049WALL*1.00DIA*.75	4130 STL TUBE	MIL-T-6736 COND N
-5	1	GAUGE	.049WALL*1.00DIA*1.25	4130 STL TUBE	MIL-T-6736 COND N
-3	1	PLATE	.063*.75*7.00	4130 STL SHT.	MIL-T-18729 COND N

[illegible]

5. IDENTICAL TO 269-9256
4. PHOSPHATE COAT PER MIL-C-12968 (A₁)
.0002 - .0004 THICK
(3) INK STAMP PART NO. (A₁)
2.
1. TO BE USED FOR RIGGING OF TAIL
ROTOR CONTROL
NOTES: UNLESS OTHERWISE SPECIFIED

FED. CODE 02731
EXT. NO.

SHOP COPY